

technical data sheet

type: Camino 15 DS MIL

Military Genset for fixed installation in Shelter and vehicles.

Type	CAMINO 15DS MIL
Power:	12,5 KW / 15 KVA
Voltage:	400/230 V
Frequency:	50 Hz
Ampere:	20 A
Safety class system:	IP54
L/W/H inclusive cap:	846x589x640 mm
Radiator L/W/H:	800x230x760 mm
Muffler L/W/H:	750x330x100 mm
Weight:	365 kg
Colour RAL:	6031


Diesel engine 3-cylinder,
Lombardini Focs, 3000 U/min.
- Engine continuous duty 14,5 KW ICM(COP)
- Start System 24V
- Diesel F54,F34,F35
- Fuel consumption 290g/kWh
- TA AIR

Standard equipment:

- Super sound damming cap 6-parts
- All filters on maintenance side
- Long Oil stick for easy Service
- Asynchronous Generators short circuit proof,
Water-cooled and inclined-load-suited
- cooled exhaust system in the sound damming cap
- Ext. muffler
- Ext. Radiator inclusive electrical circulation pump and
Fan 230 V tropical radiator clima zone. A1
- Basic panel with 5 m control line
- Electronic Engine management with battery charge
- Engine management with automatic disconnection:
to low oil pressure, to high temperatures,
loss of water
- Computer-optimised arrangement of the oscillation
absorber and integrated notice delimitation that
Rubber-bonded metals 4G in all directions
- Achievement acceptance over clamping board
- super quietly, 56 dB/A according to DIN
- Manual Ind. Std.

Optional:

Climatic compressor at auxiliary drive
for climatic achievement up to 12 KW
Space heaters utilization that
System warmth up to 20 KW
Starting limit temperature -40°C
EMV at STANAG

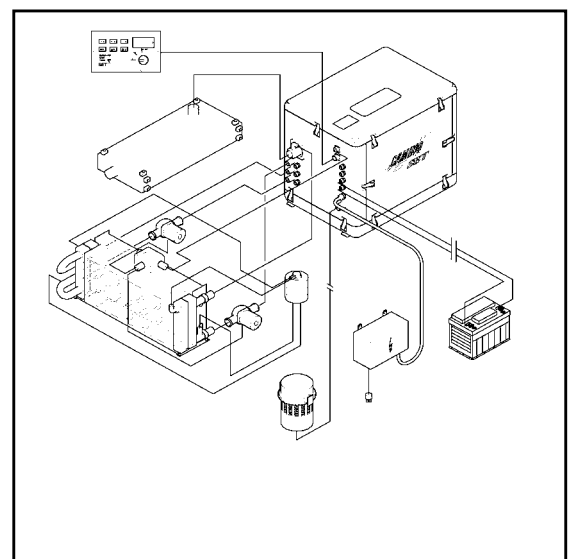

Datenblatt Typ: Camino 15 DS MIL



